



### Installation Instructions

#### EH-8000 Flexible Sprinkler Hose for Clean Room


Step 1

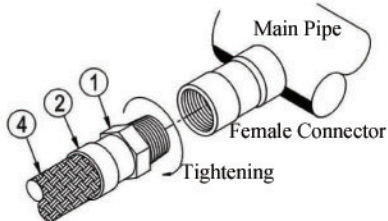


Step 2

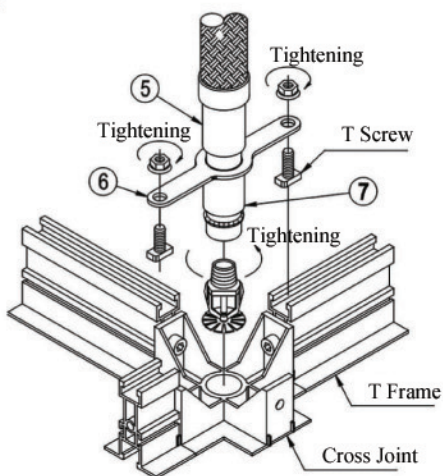

Step 1

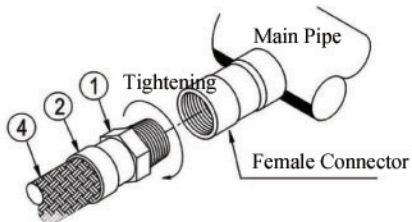


Step 2

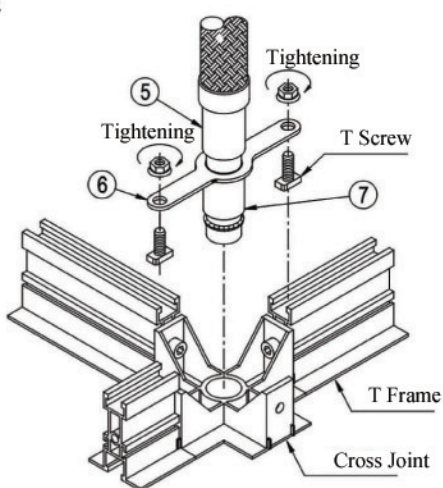

#### Method 1

- Step 1. Tighten the Nipple① to the female connector prefixed on the main pipe with pipe joint compound or Teflon tape.
- Step 2. Tighten the sprinkler head to the outlet of the sprinkler hose⑦ with pipe joint compound or Teflon tape. (Torque < 5kg-m)  
Insert the part⑦ through the top side of the pre drilled hole of the cross joint carefully.  
Fix the plate⑥ with the two sets T-screws to the T-frame.
- Step 3. Put the art cover to complete the installing.

Step 3

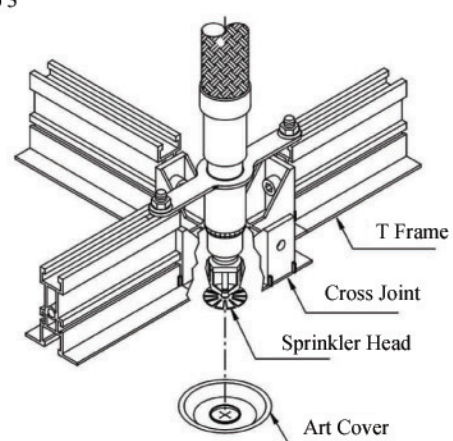

#### Method 2

- Step 1. Tighten the Nipple① to the female connector prefixed on the main pipe with pipe joint compound or Teflon tape.
- Step 2. Insert the part⑦ through the top side of the pre drilled hole of the cross joint carefully.  
Fix the plate⑥ with two sets T-screws to the T-frame.
- Step 3. Tighten the sprinkler head with compound or Teflon tape to the outlet⑦ through the art cover. (Torque < 5kg-m)

Step 3

